


**Sleeve-All®** Sleeve Anchors

Sleeve-All® sleeve anchors are pre-assembled expanding sleeve anchors for use in all types of solid base materials. These anchors are available in acorn, hex, rod coupler, flat or round head styles for a wide range of applications.

**MATERIAL:** Carbon and stainless steel


**FINISH:** Carbon Steel: Zinc plated

**INSTALLATION:**

 Caution: Oversized holes will make it difficult to set the anchor and will reduce the anchor's load capacity.

- Drill a hole in the base material using a carbide drill bit the same diameter as the nominal diameter of the anchor to be installed. Drill the hole to the specified embedment depth and blow it clean using compressed air. Overhead installations need not be blown clean. Alternatively, drill the hole deep enough to accommodate embedment depth and dust from drilling.
- Place the anchor in the fixture and drive into the hole until the washer and nut are tight against fixture.
- Tighten to required installation torque.

**CODES:** Factory Mutual 3017082, 3026805, 3029959 and 3043442, 3/8"–3/4" dia.; Underwriters Laboratories File Ex3605, 3/8"–3/4" dia. Meets requirements of Federal Specifications A-A-1922A.

 The load tables list values based upon results from the most recent testing and may not reflect those in the current code reports. Where code jurisdictions apply, consult the current reports for applicable load values.

**SUGGESTED SPECIFICATIONS:**


Sleeve anchors shall be zinc plated studs having a minimum 50,000 psi tensile strength with an expansion sleeve meeting AISI 1008 cold rolled steel or type 304 stainless steel stud with a type 304 stainless-steel expansion sleeve, as called for on the drawings. Sleeve anchors shall meet Federal Specifications A-A-1922A. Anchors shall be Sleeve-All® expanding sleeve anchors from Simpson Strong-Tie, Pleasanton, CA. Anchors shall be installed following the Simpson Strong-Tie instructions for Sleeve-All expanding sleeve anchors.

**SLEEVE-ALL ANCHORS**



Mechanical Anchors

**Sleeve-All Anchor Installation Sequence**

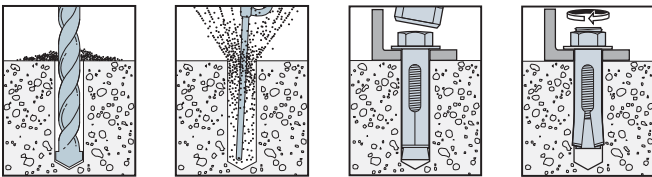

**Material Specifications**

Anchor Component	Zinc Plated Carbon Steel	304 Stainless Steel
Anchor Body	Material meets minimum 50,000 psi tensile	Type 304
Sleeve	SAE J403, Grade 1008 Cold Rolled Steel	Type 304
Nut	Commercial Grade, meets requirements of ASTM A563 Grade A	Type 304
Washer	SAE J403, Grade 1008/1010 Cold Rolled Steel	Type 304

**Sleeve-All® Anchor Installation Data**

Sleeve-All Dia. (in.)	1/4	5/16	3/8	1/2	5/8	3/4
Bit Size (in.)	1/4	5/16	3/8	1/2	5/8	3/4
Wrench Size <sup>1</sup> (in.)	3/8	7/16	1/2	9/16	3/4	15/16
Wrench Size for Coupler Nut (in.)			1/2	5/8	3/4	–

1. Applies to Acorn and Hex head configurations only.

**Length Identification Head Marks on Sleeve-All Anchors (corresponds to length of anchor – inches).**

Mark	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
From	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	6 1/2	7	7 1/2	8	8 1/2	9	9 1/2	10	11	12	13	14	15	16	17	18
Up To But Not Including	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	6 1/2	7	7 1/2	8	8 1/2	9	9 1/2	10	11	12	13	14	15	16	17	18	19

**Sleeve-All® Sleeve Anchors**

**Sleeve-All® Anchor Product Data - Zinc-Plated Carbon Steel**

Size (in.)	Model No.	Head Style	Bolt Diameter - Threads per inch	Max. Fixture Thickness (in.)	Quantity			
					Box	Ctn.		
1/4 x 1 3/8	SL25138A	Acorn Head	3/16 - 24	1/4	100	500		
1/4 x 2 1/4	SL25214A			1 1/8	100	500		
5/16 x 1 1/2*	SL31112H	Hex Head	1/4 - 20	3/8	100	500		
5/16 x 2 1/2	SL31212H			1 1/16	50	250		
3/8 x 1 7/8	SL37178H			3/8	50	250		
3/8 x 3	SL37300H			1 1/2	50	200		
3/8 x 4	SL37400H			2 1/4	50	200		
1/2 x 2 1/4*	SL50214H			1/2	50	200		
1/2 x 3	SL50300H			3/4	25	100		
1/2 x 4	SL50400H			1 3/4	25	100		
1/2 x 6	SL50600H			3 3/8	20	80		
5/8 x 2 1/4*	SL62214H			1/2	25	100		
5/8 x 3	SL62300H	1/2 - 13	3/4	20	80			
5/8 x 4 1/4	SL62414H		1 1/2	10	40			
5/8 x 6	SL62600H		3 1/4	10	40			
3/4 x 2 1/2*	SL75212H		5/8 - 11	1/2	10	40		
3/4 x 4 1/4	SL75414H			7/8	10	40		
3/4 x 6 1/4	SL75614H			2 7/8	5	20		
1/4 x 2	SL25200PF			Phillips Flat Head	3/16 - 24	7/8	100	500
1/4 x 3	SL25300PF					1 7/8	50	250
5/16 x 2 1/2	SL31212PF					1 1/4	50	250
5/16 x 3 1/2	SL31312PF		2 1/16			50	250	
3/8 x 2 3/4	SL37234PF	1 1/4	50			200		
3/8 x 4	SL37400PF	2 1/2	50			200		
3/8 x 5	SL37500PF	3 1/2	50			200		
3/8 x 6	SL37600PF	4 1/2	50			200		
1/4 x 2	SL25200R	Round Head	3/16 - 24			7/8	100	500
1/4 x 2 3/4	SL25234R					1 5/8	50	250
3/8 x 2 1/2	SL37212R			1	50	200		
3/8 x 3 3/4	SL37334R			2 1/4	50	200		
3/8 x 4 3/4	SL37434R			3 1/4	50	200		

\*These models do not meet minimum embedment requirements for rated load values.

**Sleeve-All® Anchor Product Data - Stainless Steel**

Size (in.)	Model No.	Head Style	Bolt Diameter - Threads per inch	Max. Fixture Thickness (in.)	Quantity	
					Box	Ctn.
1/4 x 2 1/4	SL2514PFSS	Phillips Flat Head	3/16 - 24	1 1/8	100	500
3/8 x 1 7/8	SL37178HSS	Hex Head	5/16 - 18	3/8	50	250
3/8 x 3	SL37300HSS			1 1/2	50	200
1/2 x 3	SL50300HSS			3/4	25	100
1/2 x 4	SL50400HSS			1 3/4	25	100

**Sleeve-All® Anchor (with rod coupler) Product Data - Zinc-Plated Carbon Steel**

Size (in.)	Model No.	Accepts Rod Dia. (in.)	Wrench Size	Quantity	
				Box	Ctn.
3/8 x 1 7/8	SL37178C	3/8	1/2	50	200
1/2 x 2 1/4	SL50214C	1/2	5/8	25	100
5/8 x 2 1/4	SL62214C	5/8	3/4	20	80

C-SAS-2012 ©2012 Simpson Strong-Tie Company Inc.


**Tension and Shear Loads for 3/8" Sleeve-All® Anchor in Grout-Filled CMU (Anchor Installed in Horizontal Mortar Joint or Face Shell)**



Size in. (mm)	Embed. Depth in. (mm)	Min. Edge Dist. in. (mm)	Min. End Dist. in. (mm)	Min. Spacing in. (mm)	Tension Load		Shear Load		Install. Torque ft-lbs (N-m)
					Ultimate lbs. (kN)	Allow. lbs. (kN)	Ultimate lbs. (kN)	Allow. lbs. (kN)	
3/8 (9.5)	1 1/2 (38)	16 (406)	16 (406)	24 (610)	2,000 (8.9)	400 (1.8)	2,300 (10.2)	460 (2.0)	15 (20)

- The tabulated allowable loads are based on a safety factor of 5.0 for installations under the IBC and IRC.
- Listed loads may be applied to installations through a face shell with the following placement guidelines:
  - Minimum 3" from vertical mortar joint.
  - Minimum 1" from vertical cell centerline.
- Values for 8-inch wide concrete masonry units (CMU) with a minimum specified compressive strength of masonry,  $f_m$ , at 28 days is 1500 psi.
- Embedment depth is measured from the outside face of the concrete masonry unit.
- Drill bit diameter used in base material corresponds to nominal anchor diameter.
- Allowable loads may not be increased for short-term loading due to wind or seismic forces.

\*See page 13 for an explanation of the load table icons

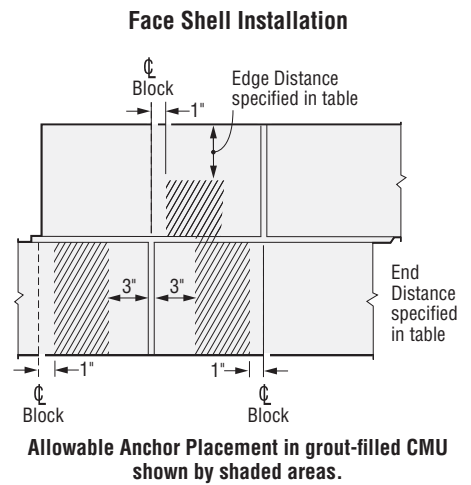

Mechanical Anchors