


P2755, P2756, P2757

RACEWAY HANGERS




Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2755	9/16 14.3	44 20.0
P2756	7/8 22.2	44 20.0
P2757	1 1/32 10.3	44 20.0

Use with Channels:
P1001, P1101, P2001,
P5000, & P5500.
Material: 14 gauge (1.9).

P2855, P2856, P2857

RACEWAY HANGERS




Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2855	9/16 14.3	32 14.5
P2856	7/8 22.2	32 14.5
P2857	1 1/32 10.3	32 14.5

Use with Channels:
P1000, P1100,
P3000, P3300
Material: 14 gauge (1.9).

P2537, P5537

FLUORESCENT FIXTURE HANGERS





Design Load
120 Lbs (0.53 kN)

• Hanger provides more than 1/2" (12.7) space
between channel and fixtures.
Materials: 18 gauge (1.2).

P2602

MERCURY VAPOR FIXTURE HANGER

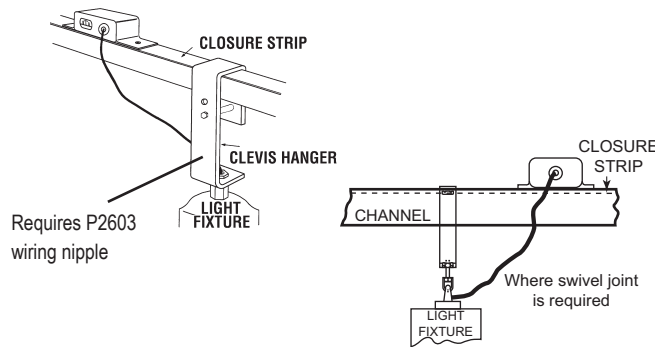


Use with 1 1/2" Channel
Finish: Electro-galvanized
Stock Size: 1/4"
NOTE: Supports fixture in slot up or down system.

Wt/100 pcs: 154 Lbs (69.9 kg)

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2537	P1000		
	P1100	27/16 61.9	19 8.6
	P3000		
P5537	P5500	3 1/4 82.6	22 10.0

P2539, P3539, P5539

FLUORESCENT FIXTURE HANGERS




• Hanger provides 1/8" (3.2)
space between channel
and fixtures.
Materials: 18 gauge (1.2).

Design Load
120 Lbs (0.53 kN)

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2539	P1000	1 1/4 44.5	17 7.7
	P1100	1 1/2 38.1	15 6.8
P3539	P3000	1 1/2 38.1	15 6.8
P5539	P5500	2 5/16 65.1	18 8.2

P3922 THRU P3926

SPLICE FITTINGS

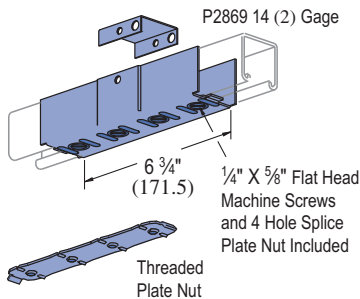


Assy. No.	Use W/ Channel	"A" In (mm)	Clevis No.	Back Clevis No.	Plate Nut No.	Wt/100 pcs Lbs (kg)
P3922	P1000	1 5/8 41.3	P2377	P2517	P2869	100 45.4
	P1100					
P3923	P3000	1 3/8 34.9	P3377	P2517	P2869	97 44.0
P3924	P4000	1 1/16 20.6	P5377	P2517	P2869	80 36.3
P3925	P5500	1 1/8 41.3	P2377	P5517	P2869	103 46.7
P3926	P5000	1 5/8 41.3	P2377	P5017	P2869	106 48.1

Material: 16 gauge (1.6).

P3521-50

END CONNECTORS FOR 1/2" CONDUIT



1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included

Material: 12 gauge (3).


Wt/100 pcs: 27 Lbs (12.2 kg)

P2521-50, P2521-75

END CONNECTORS FOR 1/2" & 3/4" CONDUIT



1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included



Part No.	Conduit Size In	Wt/100 pcs Lbs (kg)
P2521-50	1/2	27 12.2
	3/4	26 11.8


Use with channels:
P1000 and P1100.
Material:
12 gauge (3)

P5521-50, P5521-75

END CONNECTORS FOR 1/2" & 3/4" CONDUIT



1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included




Part No.	Conduit Size In	Wt/100 pcs Lbs (kg)
P5521-50	1/2	27 12.2
	3/4	26 11.8

Material:
12 gauge (3).



1 5/8" Channel
 Telestrut
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 Unipier®


P5021-50, P5021-75 END CONNECTOR FOR 1/2" & 3/4" CONDUIT



Part No.	Conduit Size A In	Wt/100 pcs Lbs (kg)
P5021-50	1/2	31 14.1
P5021-75	3/4	30 13.6

Material: 12 gauge (2.7).

P2521-100 END CONNECTOR FOR 1" CONDUIT




Material: 12 gauge (2.7).

Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)


P5021-100 END CONNECTOR FOR 1" CONDUIT



Material: 12 gauge (2.7).

Wt/100 pcs: 28 Lbs (12.7 kg)


P5521-100 END CONNECTOR FOR 1" CONDUIT



Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P2541




Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

SPACER CLEVIS




P1180W THRU P5580 END CAPS



Material: 14 gauge (1.9)

Part Number	Use With	Wt/100 pcs Lbs (kg)
P1180W	P1100	12 (5.4)
P1280W	P1000	11 (5.0)
P2280W	P2000	11 (5.0)
P3280W	P3000	8 (3.6)
P4280W	P4000	5 (2.3)
P5280W	P5000	22 (10.0)
P5580W	P5500	18 (8.2)


P2603 FIXTURE WIRING NIPPLE



Assembly: 1/2" x 2" rigid conduit nipple Bushing Locknut

Wt/100 pcs: 14 Lbs (6.4 kg)

P2540, P2540A



Stamped Ident. No.
 P2540 - 121961
 P2540A - 121960
 Material: Sintered metal.

1/2" American Standard Straight Pipe Thread


Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2540	1 5/64 27.4	10.0 4.5
P2540A	5/8 15.9	8 3.6

Design Load
 320 Lbs (1.42 kN)

WIRING STUD NUT




P2802 JUNCTION BOX COVER




Wt/100 pcs: 30 Lbs (13.6kg)

P2803




Stamp ID No. 122022



P2801


Wt/100 pcs: 32 Lbs (14.5 kg)

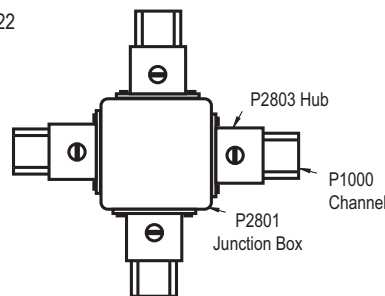

Note: Combine junction box (P2801) and hub assemblies (P2803) to make 1, 2, 3, or 4 way junction box.


HUB ASSEMBLY

P2801 JUNCTION BOX



Wt/100 pcs: 113 Lbs (51.4 kg)


P3116-125
FIXTURE STUD NUT



Wt/100 pcs: 11 Lbs (5.0 kg)

P2552

POLYPROPYLENE WIRE RETAINER




Retainer may be easily pushed into channel to support wires until closure strip is installed.

Wt/100 pcs: .30 Lbs (.1 kg)




P2904



3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Extruded Aluminum

Wt/100 pcs: 12 Lbs (5.4kg)


P2900



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 20 Lbs (9.1 kg)


P2901



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 35 Lbs (15.9 kg)


P2902



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 27 Lbs (12.2 kg)

P2903




3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 45 Lbs (20.4 kg)

M2037, M2050

SWIVEL HANGERS




Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In (mm)	Wt/100 pcs Lbs (kg)
M2037	3/8" - 16	2 ³¹ / ₃₂ 75.4	23 10.4
M2050	1/2" - 13	2 ³ / ₄ 69.9	32 14.5

M2250

SWIVEL HANGER




Design Load
600 Lbs (2.67 kN)

Wt/100 pcs: 18 Lbs (8.2 kg)

M2137, M2150

SWIVEL HANGERS




Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In (mm)	Wt/100 pcs Lbs (kg)
M2137	3/8" - 16	2 ²⁹ / ₃₂ 74	27 12.2
M2150	1/2" - 13	2 ³ / ₄ 69.9	45 20.4

M2350

SWIVEL HANGER



Design Load
600 Lbs (2.67 kN)

Wt/100 pcs: 20 Lbs (9.1 kg)