

A36Q - Resin Bonded

- Aluminum oxide grain
- For deburring and finishing
- **Fast stock removal**

METAL Ferrous metals (iron, steel, welds)

- Shank length 1-1/2"



Mandrel overhang "O" must always be the lowest possible. Maximum speeds given refer to overhang "O" equal to 1/2"




Die Grinder

A60R - Vitrified

- Aluminum oxide grain
- **Ideal for ID grinding and mold finishing**

METAL Ferrous metals

- Shank length 1-1/2"

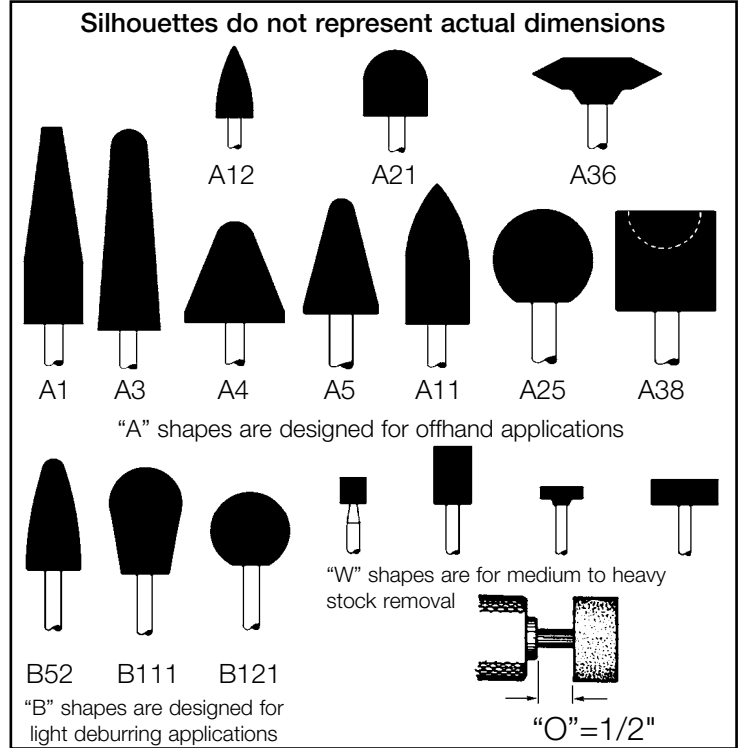

Type	Size		Shank Dia.	A36Q Part Number	A60R Part Number	"O" = 1/2" Max RPM	Qty Per Box
	Dia.	Length					
A1	3/4	2-1/2	1/4	27401	27010	19,800	10
A3	1	2-3/4	1/4	27402	27020	16,100	10
A4	1-1/4	1-1/4	1/4	27403	27030	30,560	10
A5	3/4	1-1/8	1/4	27404	27035	45,000	10
A11	7/8	2	1/4	27405	27040	19,860	10
A12	11/16	1-1/4	1/4	-	27050	48,000	10
A21	1	1	1/4	-	27060	34,500	10
A25	1	Round	1/4	-	27070	35,620	10
A36	1-5/8	3/8	1/4	-	27086	23,520	10
A38	1	1	1/4	27406	27088	34,500	10
B52	3/8	3/4	1/4	27407	-	45,370	10
B52	3/8	3/4	1/8	-	27110	45,370	20
B111	7/16	11/16	1/8	-	27120	33,750	20
B121	1/2	1/2	1/8	-	27130	45,370	20
W160	1/4	1/4	1/8	-	27308	81,370	10
W177	3/8	3/4	1/8	-	27310	33,750	20
W179	3/8	1-1/4	1/4	27408	-	45,750	10
W189	1/2	2	1/4	27409	27327	24,000	10
W196	5/8	1	1/4	-	27329	35,250	10
W204	3/4	3/4	1/4	27410	27320	42,750	10
W208	3/4	2	1/4	27411	27330	18,750	10
W215	1	1/8	1/8	-	27338	38,200	10
W220	1	1	1/4	27412	27360	25,500	10
W222	1	2	1/4	27413	27340	15,900	10
W225	1-1/4	1/4	1/4	-	27350	30,560	10
W236	1-1/2	1/2	1/4	27414	27349	25,470	10



- These mounted bonded points are a low cost alternative to carbide burs
- Each point is dressed for perfect dia. to perform without vibration or run-out